


Ilio - Glossy Black - 3000K - App Compatible

Ernesto Gismondi



IP20     Dimmerable: +0-

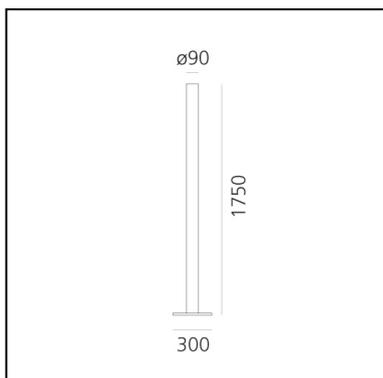

LUMINAIRE

- Watt: **45W**
- Voltage: **220-240V**
- Delivered lumens output: **3564lm**
- CCT: **3000K**
- Efficiency: **88%**
- Efficacy: **79.2lm/W**
- CRI: **90**
- Dimmer Typology: **Microswitch Dimmer**

DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

PRODUCT CODE: 1640030APP

FEATURES

- Article Code: **1640030APP**
- Colour: **Glossy Black**
- Installation: **Floor**
- Material: **Aluminium, steel**
- Series: **Design Collection**
- Environment: **Indoor**
- Area contract: **Hospitality, Residential**
- Emission: **Indirect**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Height: **cm 175**
- Diameter: **cm 9**
- Base Length: **cm 30**
- Base Width: **cm 30**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **37W**
- Delivered lumens output: **3899lm**
- Color temperature (K): **3000K**
- CRI: **90**
- Color Tolerance: **MacAdam 2SDCM**
- Efficacy: **107lm/W**
- Service Life: **50000-L70**

Accessories



Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP